

# CT-308RF

Multi-function

LED

## Controller



### Product Speciality

- Under the control of wireless, the effective remote control distance is 50 meters.
- 3 channel RGB control , the max current of each channel up to 5A.
- Multi-Mode to select.
- Stay at chosen color.
- 8 scale speed.


### Application Sites

- Building Decoration: Business spaces, airports, subway.
- Indoor Decoration: Lighting and back lighting for hospital, hotel, marketplace, square, dining-room, pub and etc..
- AD solid Word, sign and mark, signboard and billboard.
- Be used as big area back lighting source.

### Product Attributes


DC input voltage	12/24V
Output power	5A(Max) per channel, 12V: 180W; 24V: 360W
Size	211(L)X40(W)X30(H) mm
Remote distance	50 meters
Weight	310g

### Dimension

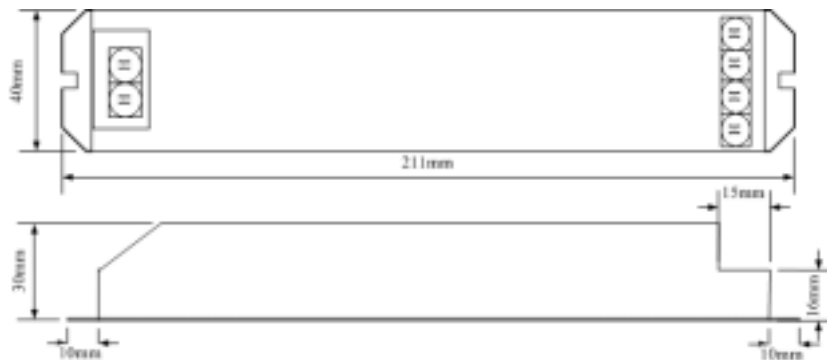

### Change Mode Instruction

Mode Name	Mode Description
M1	Seven Color Flash
M2	Leaning Color Fade
M3	Full Color Fade
M4	Loop
M5-11	Seven Fixation Color

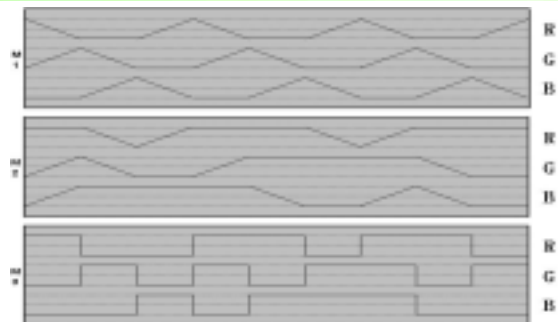

### Operation Instruction


The Functions of the buttons:

#### A Mode; B Pause; C Speed up; D Speed down

- A:** Press it to change the mode to the next one ;
- B:** Press it to make the LED stays at the present color, press it again then the color change moves on;
- C:** Press it to make the change speed of the LED to a faster level ( Default is fastest level ) ;
- D :** Press it to make the change speed of the LED to a slower level.



### Wiring Instruction

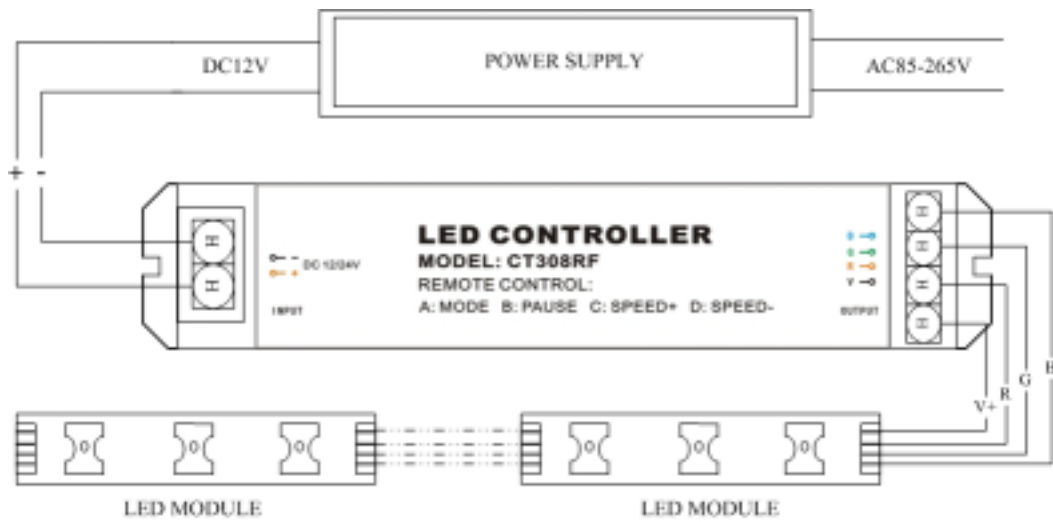

**Remark:**

Can control various single color modules and RGB modules with the common anode.